


**MODEL: VPB-400  
INSTRUCTION MANUAL**

PLEASE READ INSTRUCTION MANUAL CAREFULLY  
BEFORE USE AND KEEP IT FOR FUTURE REFERENCE

# OVERVIEW

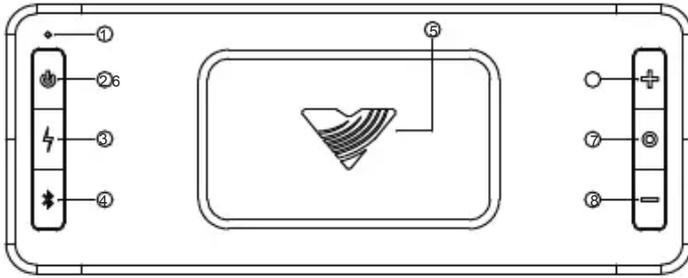

- ① LED Indicator
- ② Power Button ( )
- ③ Charger Button ( )
- ④ Bluetooth Button ( )
- ⑤ Wireless Charging Pad
- ⑥ Volume Up
- ⑦ Multi-Function Button ( )
- ⑧ Volume Down

- Power On / Off ..... Long Press (1 sec) button
- Volume Up ..... Press + button
- Volume Down ..... Press - button
- Play/Pause ..... Single Press button
- Next Track ..... Double Press button
- Previous Track ..... Triple Press button
- Enter MP3 USB Mode ..... Press and hold (5 sec) button
- Bluetooth Mode ..... Single Press button
- AUX Mode ..... Single Press button again
- Pair a Device ..... Long Press (1 sec) button
- Disconnect Bluetooth Device ..... Press and hold (5 sec) button
- Check Charging Status ..... Press button
- Wireless Charging On/Off ..... Long Press (1 sec) button
- Factory Reset ..... Press and hold button (10 sec)

## BLUETOOTH PAIRING



Press the  button to begin Bluetooth Pairing.  
(Flashing Blue light)

Wait for the “**Victrola ME2**” to appear on your available devices list of your external device and press “**Victrola ME2**”

Once paired, the ME2 will play a paired chime and the light will turn solid Blue for 2 seconds

## AUX - IN



To enter AUX-IN Mode, Press the  button to cycle between AUX and Bluetooth Modes. AUX Mode will have a Yellow LED.

Plug an Auxillary Cord (not included) from your ME2 to your external device to begin playback.

*NOTE: If an AUX-IN cord is inserted while in Bluetooth mode, AUX-IN will override the Bluetooth function.*

## USB - C MP3 PLAYBACK



Long Press the  Button until the LED flashes Orange, then turns solid Orange.

The unit is now in USB MP3 Playback mode. Use the  button to play, pause and skip MP3 files from a connected USB-C Flash drive (See Overview Controls) (USB-C Flash drive not included).

# DUAL SPEAKER PAIRING



Press the **✂** and **O** button simultaneously for 1 second on BOTH speakers to enter Dual Speaker Pairing Mode (Flashing Purple light)

**PAIRING COMPLETE:** Chime and solid purple LED indicate speakers are connected (speakers always connect in MONO mode)

**MONO/STEREO CHANNEL SWITCHING:** After Dual

Speaker Pairing is connected, press the **✂** and **O** button on EITHER speaker to switch between **MONO** and **STEREO** pairing mode

**STEREO MODE** – The right channel will flash purple 3 times quickly

**MONO MODE** – Both units will be solid purple for 2 seconds

**TO DISCONNECT:** Press and hold **✂** and **O** button on EITHER speaker for 5 seconds to disconnect dual-speaker pairing

## PLEASE NOTE:

*-If BOTH devices are in Dual Speaker Pairing Mode and do not connect, try placing speakers closer together.*

*-Dual Speaker Pairing only works with another Victrola Music Edition 2 speaker.*

## WIRELESS CHARGING



*Wireless charging pad is ALWAYS ON when unit is plugged in to power, whether unit is turned on or not.*

### **WIRELESS CHARGER (ON BATTERY POWER):**

*Charger is OFF by default when on battery power*

### **TURN WIRELESS CHARGING ON & OFF**

*Long press the  button (1 Second)*

### **WIRELESS CHARGER ON/OFF STATUS**

*Single Press the  button*

*If LED flashes, charger is ON, if LED does not flash, charger is OFF*

*Wireless charger automatically turns OFF after 5 minutes if no phone is charging.*

## BATTERY STATUS



### **CHECK BATTERY LEVEL**

*Single press  button when unit is powered on to view battery level*

<b>LED Indicator Color</b>	<b>Battery Level</b>
Green .....	50-100%
Orange .....	26-49%
Red .....	10%-25%
Flashing Red .....	< 10%
Flashing White .....	Charging
OFF (while plugged in) .....	Fully Charged

# SPECIFICATIONS

## GENERAL

Weight	1.35kg
Drivers	$\varnothing 90\text{mm} + \varnothing 52\text{mm}$
Frequency response	55Hz-20KHz
Battery working time	20 hours <i>(varies by audio content and volume level)</i>
Charging time	5 hours
Charging port type	USB-C
Battery type	Rechargeable Li-ion Battery (7.4V / 4400mAh)

## BLUETOOTH

Bluetooth Version	Bluetooth V5.0
Bluetooth Profile	A2DP V1.3, AVRCP V1.6
Bluetooth Frequency Range	2402-2480MHz
Bluetooth Transmitting Power	3.95dBm
Bluetooth Transmitting Modulator	GFSK, $\pi/4$ DQPSK, 8DPSK

## WIRELESS POWER CONSORTIUM

Operation Frequency	111.8kHz to 145.2kHz
---------------------	----------------------

## INCLUDED:

ME2 Speaker, Manual, Power Adaptor, USB-C Charging Cable

Design and specification are subject to change without notice

Bluetooth is a registered trademark of Bluetooth SIG, Inc.  
Other trademarks and trade names are those of their respective owners

Designed in Denver, Colorado | Made in China

